


Product Overview Ted	chnical Specifications	Documentation	Drawings		
Input				Print Technical Specification	
Nominal Input Voltage	208V , 23	0V			
Input frequency	50/60 Hz				
Input Connections	British BS	1363A, IEC-320 C14, So	chuko CEE 7/7P		
Number of Power Cords Physical	1				
Maximum Height	60mm , 6	.0CM			
Maximum Width	724mm ,	724mm , 72.4CM			
Maximum Depth	893mm ,	893mm , 89.3CM			
Net Weight	10.23KG	10.23KG			
Shipping weight	14.0KG	14.0KG			
Shipping Height	165mm ,	165mm , 16.5CM			
Shipping Width	914mm ,	914mm , 91.4CM			
Shipping Depth	991mm ,	99.1CM			
Color Environmental	Black				
Audible noise at 1 meter fro	om surface 62.0dBA				
Conformance					
Approvals	CSA C22	.2 No. 60950, PSE, UL 6	0950		
Standard warranty	2 years re	pair or replace			
Sustainable Offer Sta	itus				
RoHS	Complian	t			
General					

1 of 2 05-Dec-17, 6:30 PM

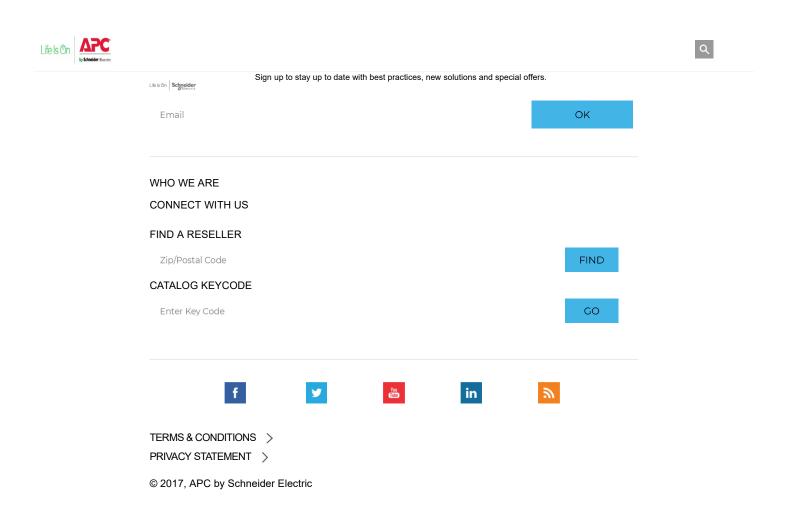

2 of 2