


Share:



AP7820B



Description: Metered rack Power Distribution Units (PDUs) provide real-time remote monitoring of connected loads. User-defined alarms warn of potential circuit overloads before critical IT failures occur.
Includes : Cord Retention Bracket(s) , Installation Guide , Rack Mounting Brackets , User Manual

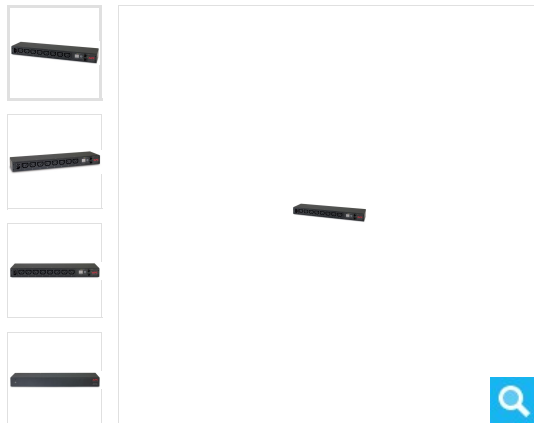

Rack PDU, Metered, 1U, 12A/208V, 10A/230V, (8) C13

Call for More Information
66 2 617 5555

Includes: Cord Retention Bracket(s) , Installation Guide , Rack Mounting Brackets , User Manual

Related Products, Accessories & Services

[View all accessories and replacement batteries for this product](#)



1 Year Of Remote Monitoring Service For (1) Node

Call for More Information
66 2 617 5555



1 Year APC Remote Monitoring Service For 1 Node

Call for More Information
66 2 617 5555



InfraStruXure Manager, 25 Node License Only

Call for More Information
66 2 617 5555

[Product Overview](#)

[Technical Specifications](#)

[Documentation](#)

[Drawings](#)

[Software & Firmware](#)

[Options](#)

Output

[Print Technical Specification](#)

Nominal Output Voltage	208V , 230V
Overload Protection	No
Maximum Total Current Draw	10
Output Connections (8) IEC 320 C13 (Battery Backup)	
Different voltages and corresponding amperages	10A @ 230V, 12A @ 208VA

Input

Nominal Input Voltage	200V , 208V , 230V
Input frequency	50/60 Hz
Input Connections	IEC-320 C14
Cord Length	1.98meters
Load Capacity	2300VA
Maximum Input Current	15A
Regulatory Derated Input Current	10A



Maximum Width	444mm , 44.4CM
Maximum Depth	102mm , 10.2CM
Rack Height	1U
Net Weight	1.73KG
Shipping weight	2.91KG
Shipping Height	64mm , 6.4CM
Shipping Width	470mm , 47.0CM
Shipping Depth	337mm , 33.7CM
Environmental	
Operating Temperature	-5 - 45 °C
Operating Relative Humidity	5 - 95 %
Operating Elevation	0-3000meters
Storage Temperature	-25 - 65 °C
Storage Relative Humidity	5 - 95 %
Storage Elevation	0-15000meters
Conformance	
Approvals	cUL Listed, C-tick, CE, CSA, FCC Part 15 Class A, GOST, UL 60950, UL Listed, VDE, VCCI
Standard warranty	2 years repair or replace
Sustainable Offer Status	
RoHS	Compliant
REACH	REACH: Contains No SVHCs
Battery Directive	Compliant
Battery Notes	ts_Battery_Notes

Sign up to stay up to date with best practices, new solutions and special offers.



Email

OK

WHO WE ARE

CONNECT WITH US

FIND A RESELLER

Zip/Postal Code

FIND

CATALOG KEYCODE

Enter Key Code

GO



TERMS & CONDITIONS >

