



Share:




AP7921B



Description: Switched Rack Power Distribution Units (PDUs) provide advanced load monitoring combined with remote on/off switching control of individual outlets for power cycling, delayed power sequencing, and outlet use management.

Includes : Installation Guide , Rack Mounting Brackets , User Manual

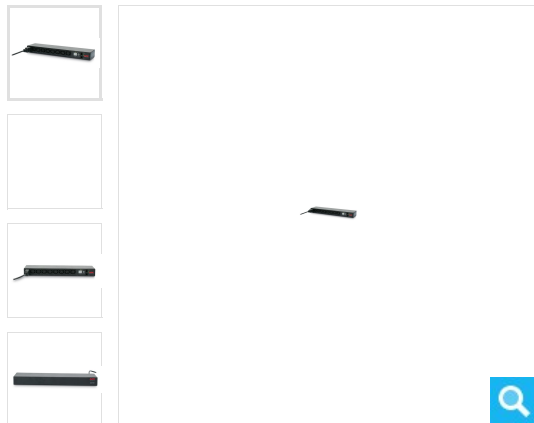

Rack PDU, Switched, 1U, 16A, 208/230V, (8)C13

Call for More Information
66 2 617 5555

Includes: Installation Guide , Rack Mounting Brackets , User Manual

Related Products, Accessories & Services

[View all accessories and replacement batteries for this product](#)



1 Year Warranty Extension For (1) Accessory (Renewal Or High Volume)

Call for More Information
66 2 617 5555

1 Year APC Remote Monitoring Service For 1 Node

Call for More Information
66 2 617 5555

2 Years Of Remote Monitoring Service For (25) Nodes

Call for More Information
66 2 617 5555

[Product Overview](#)

[Technical Specifications](#)

[Documentation](#)

[Drawings](#)

[Software & Firmware](#)

[Options](#)

Output

[Print Technical Specification](#)

Nominal Output Voltage 208V , 230V

Maximum Total Current Draw 16

Output Connections
(8) IEC 320 C13 (Battery Backup)

Input

Nominal Input Voltage 200V , 208V , 230V

Input frequency 50/60 Hz

Input Connections IEC-320 C20

Cord Length 2.5meters

Acceptable Input Voltage 200-240VAC

Number of Power Cords 1

Load Capacity 3680VA

Maximum Input Current 20A

Regulatory Derated Input Current (North America) 16A



Maximum Height	445mm , 44.5CM
Maximum Width	445mm , 44.5CM
Maximum Depth	108mm , 10.8CM
Rack Height	1U
Net Weight	2.27KG
Shipping weight	3.45KG
Shipping Height	70mm , 7.0CM
Shipping Width	470mm , 47.0CM
Shipping Depth	343mm , 34.3CM
Color	Black
Environmental	
Operating Temperature	0 - 45 °C
Operating Relative Humidity	0 - 95 %
Operating Elevation	0-3000meters
Storage Temperature	-25 - 65 °C
Storage Relative Humidity	0 - 95 %
Storage Elevation	0-15000meters
Conformance	
Approvals VCCI	cUL Listed, CE, CSA, EN 55022 Class A, EN 55024, EN 61000-3-2, EN 61000-3-3, GOST, IRAM, MIC, UL 60950, UL Listed, VDE,
Standard warranty	2 years repair or replace
Sustainable Offer Status	
RoHS	Compliant
REACH	REACH: Contains No SVHCs
Battery Directive	Compliant
Battery Notes	ts_Battery_Notes

Sign up to stay up to date with best practices, new solutions and special offers.



Email

OK

WHO WE ARE

CONNECT WITH US

FIND A RESELLER

Zip/Postal Code

FIND

CATALOG KEYCODE

Enter Key Code

GO





© 2017, APC by Schneider Electric