




Share:



### AP8953

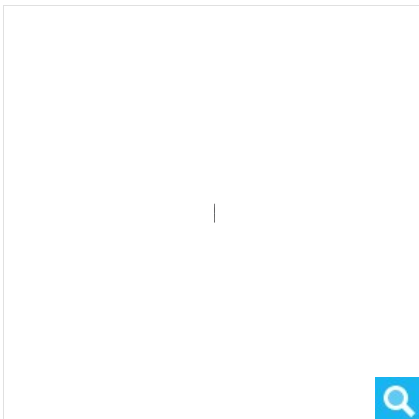

Description: APC Switched Rack Power Distribution Units (PDUs) enable advanced, user-customizable power control and active monitoring. Remote outlet level controls allow power on/off functionality for power recycling to remotely reboot equipment and restrict unauthorized use of individual outlets. Power sequencing delays allow users to define the order in which to power up or down attached equipment. Avoid circuit overload during power recovery and extend uptime of critical equipment by prioritizing the load shedding. Current metering provides real-time remote monitoring of connected loads. Switched Rack PDUs include real power monitoring, a temperature/humidity sensor port, locking IEC receptacles, and low profile circuit breakers. User-defined alarms warn of potential circuit overloads before critical IT failures occur. Users can access, configure, and control Switched Rack PDUs through secure Web, SNMP, or Telnet Interfaces and is complimented by APC Centralized Management platforms using InfraStruxure Central, Capacity Manager and Change Manager.

Includes : Installation guide , Rack Mounting brackets , Safety guide , Serial configuration cable

#### Rack PDU 2G, Switched, ZeroU, 32A, 230V, (21) C13 & (3) C19

APC Switched Rack Power Distribution Units (PDUs) enable advanced, user-customizable power control and active monitoring. Remote outlet level controls allow power on/off functionality for power recycling to remotely reboot equipment and restrict unauthorized use of individual outlets. Power sequencing delays allow users to define the order in which to power up or down attached equipment. Avoid circuit overload during power recovery and extend uptime of critical equipment by prioritizing the load shedding. Current metering provides real-time remote monitoring of connected loads. Switched Rack PDUs include real power monitoring, a temperature/humidity sensor port, locking IEC receptacles, and low profile circuit breakers. User-defined alarms warn of potential circuit overloads before critical IT failures occur. Users can access, configure, and control Switched Rack PDUs through secure Web, SNMP, or Telnet Interfaces and is complimented by APC Centralized Management platforms using InfraStruxure Central, Capacity Manager and Change Manager.

Call for More Information  
66 2 617 5555

Includes: Installation guide , Rack Mounting brackets , Safety guide , Serial configuration cable

## Related Products, Accessories & Services

[View all accessories and replacement batteries for this product](#)



**1 Year Warranty Extension For (1) Accessory (Renewal Or High Volume)**

Call for More Information  
**66 2 617 5555**



**2 Years Of Remote Monitoring Service For (1) Node**

Call for More Information  
**66 2 617 5555**



**1 Year Of Remote Monitoring Service For (1) Node**

Call for More Information  
**66 2 617 5555**

[Product Overview](#)

[Technical Specifications](#)

[Documentation](#)

[Drawings](#)

[Software & Firmware](#)

[Options](#)

### Output

[Print Technical Specification](#)

Overload Protection	Yes
Maximum Total Current Draw	32



Normal Input Voltage	200V , 200V , 200V
Input frequency	50/60 Hz
Input Connections	IEC 309 32A 2P+E
Cord Length	3.05meters
Acceptable Input Voltage	220-240VAC
Number of Power Cords	1
Maximum Input Current	32A
Maximum Line Current	32A

**Physical**

Maximum Height	1829mm , 182.9CM
Maximum Width	56mm , 5.6CM
Maximum Depth	46mm , 4.6CM
Net Weight	7.59KG
Shipping weight	9.95KG
Shipping Height	2040mm , 204.0CM
Shipping Width	165mm , 16.5CM
Shipping Depth	124mm , 12.4CM
Color	Black
Units per Pallet	48.0

**Environmental**

Operating Temperature	-5 - 45 °C
Operating Relative Humidity	5 - 95 %
Operating Elevation	0-3000meters
Storage Temperature	-25 - 65 °C
Storage Relative Humidity	5 - 95 %
Storage Elevation	0-15000meters

**Conformance**

Approvals	EN 55022 Class A, EN 55024, EN 61000-3-2, EN 61000-3-3, VDE
Standard warranty	2 years repair or replace

**Sustainable Offer Status**

RoHS	Compliant
REACH	REACH: Contains No SVHCs
PEP	Available in Documentation tab
EOLI	Available in Documentation tab
Battery Directive	Compliant
Battery Notes	ts_Battery_Notes

Sign up to stay up to date with best practices, new solutions and special offers.



Email



WHO WE ARE



Zip/Postal Code

FIND

CATALOG KEYCODE

Enter Key Code

GO



[TERMS & CONDITIONS >](#)

[PRIVACY STATEMENT >](#)

© 2017, APC by Schneider Electric