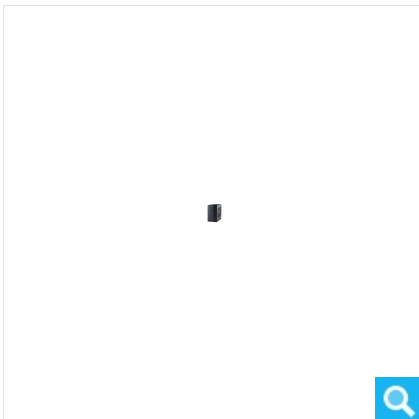


Share:

**BX650CI**

Description: Battery Backup & Surge Protector for Electronics and Computers
Includes : Qty 1 - Detachable 1.2 m IEC power cord , User Manual

APC Back-UPS 650VA, AVR, 230V


Call for More Information
66 2 617 5555

Includes: Qty 1 - Detachable 1.2 m IEC power cord , User Manual

Product Overview

Technical Specifications

Documentation

OutputPrint Technical Specification 

Output power capacity	390Watts / 650VA
Max Configurable Power (Watts)	390Watts / 650VA
Nominal Output Voltage	230V
Output Frequency (sync to mains)	50/60Hz +/- 3 Hz
Output Frequency (not synced)	50/60 Hz +/-1 Hz
Topology	Line Interactive
Waveform type	Stepped approximation to a sinewave
Output Connections (4) IEC 320 C13 (Battery Backup) (1) IEC Jumpers (Battery Backup)	
Transfer Time	6ms typical : 10ms maximum

Input

Nominal Input Voltage	230V
Input frequency	45 - 65 Hz
Input Connections	IEC-320 C14
Cord Length	1.16meters
Input voltage range for main operations	140 - 300V
Maximum Input Current	7.0A

Batteries & Runtime

Battery type	Maintenance-free sealed Lead-Acid battery with suspended electrolyte : leakproof	
Typical recharge time	8hour(s)	
Expected Battery Life (years)	3 - 5	
Runtime	View Runtime Graph	View Runtime Chart
Efficiency	View Efficiency Graph	

Communications & Management

Control panel	LED status display with On Line : On Battery : Replace Battery and Overload indicators
Audible Alarm	Alarm when on battery : distinctive low battery alarm : overload continuous tone alarm

Surge Protection and Filtering



Maximum Height	200mm , 20.0CM
Maximum Width	115mm , 11.5CM
Maximum Depth	257mm , 25.7CM
Net Weight	6.2KG
Shipping weight	7.0KG
Shipping Height	270mm , 27.0CM
Shipping Width	198mm , 19.8CM
Shipping Depth	340mm , 34.0CM
Master Carton Units	2.0
Units per Pallet	36.0
SCC Codes	1073130428508 0

Environmental

Operating Temperature	0 - 40 °C
Operating Relative Humidity	0 - 95 %
Operating Elevation	0-3000meters
Storage Temperature	-15 - 45 °C
Storage Elevation	0-9000meters
Audible noise at 1 meter from surface of unit	45.0dBA

Conformance

Approvals	CE, EN/IEC 60950-1, GOST, NEMKO
Standard warranty	2 years repair or replace

Sustainable Offer Status

RoHS	Compliant
REACH	REACH: Contains No SVHCs
PEP	Available in Documentation tab
EOLI	Available in Documentation tab

Sign up to stay up to date with best practices, new solutions and special offers.



Email

OK

WHO WE ARE

CONNECT WITH US

FIND A RESELLER

Zip/Postal Code

FIND

CATALOG KEYCODE

Enter Key Code

GO



[TERMS & CONDITIONS >](#)

[PRIVACY STATEMENT >](#)

© 2017, APC by Schneider Electric