




Share:



SMT1001

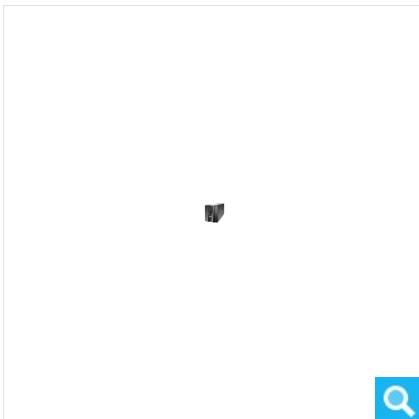

Description: Intelligent and efficient network power protection from entry level to scaleable runtime. Ideal UPS for servers, point-of-sale, routers, switches, hubs and other network devices.
Includes : CD with software , Documentation CD , Installation guide , Smart UPS signalling RS-232 cable , USB cable

APC Smart-UPS 1000VA LCD 230V

Call for More Information
66 2 617 5555

Includes: CD with software , Documentation CD , Installation guide , Smart UPS signalling RS-232 cable , USB cable

Related Products, Accessories & Services

[View all accessories and replacement batteries for this product](#)



UPS Network Management Card 2

Call for More Information
66 2 617 5555



UPS Network Management Card 2 With Environmental Monitoring

Call for More Information
66 2 617 5555



3 Year Concurrent Extended Warranty For (1) Smart-UPS 0-1kVA

Call for More Information
66 2 617 5555

[Product Overview](#)

[Technical Specifications](#)

[Documentation](#)

[Software & Firmware](#)

[Options](#)

Output

[Print Technical Specification](#)

Output power capacity	700Watts / 1.0 kVA
Max Configurable Power (Watts)	700Watts / 1.0 kVA
Nominal Output Voltage	230V
Output Voltage Note	Configurable for 220 : 230 or 240 nominal output voltage
Output Voltage Distortion	Less than 5% at full load
Output Frequency (sync to mains)	47 - 53 Hz for 50 Hz nominal, 57 - 63 Hz for 60 Hz nominal
Other Output Voltages	220, 240
Topology	Line Interactive
Waveform type	Sine wave

Output Connections
(8) IEC 320 C13 (Battery Backup)
(2) IEC Jumpers (Battery Backup)

Input

Nominal Input Voltage	230V
Input frequency	50/60 Hz +/- 3 Hz (auto sensing)
Input Connections	IEC-320 C14
Input voltage range for main operations	160 - 286V



Battery type maintenance-free sealed lead-acid battery with suspended electrolyte, non-spill

Typical recharge time	3hour(s)
Replacement Battery	RBC6
Expected Battery Life (years)	3 - 5
RBC Quantity	1
Runtime	View Runtime Graph View Runtime Chart
Efficiency	View Efficiency Graph

Communications & Management

Interface Port(s)	RJ-45 Serial , SmartSlot , USB
Control panel	Multi-function LCD status and control console
Audible Alarm	Alarm when on battery : distinctive low battery alarm : overload continuous tone alarm
Emergency Power Off (EPO)	Optional
Available SmartSlot™ Interface Quantity	1

Surge Protection and Filtering

Surge energy rating	459Joules
Filtering	Full time multi-pole noise filtering : 0.3% IEEE surge let-through : zero clamping response time : meets UL 1449

Physical

Maximum Height	219mm , 21.9CM
Maximum Width	171mm , 17.1CM
Maximum Depth	439mm , 43.9CM
Net Weight	18.86KG
Shipping weight	22.77KG
Shipping Height	376mm , 37.6CM
Shipping Width	328mm , 32.8CM
Shipping Depth	595mm , 59.5CM
Color	Black
Units per Pallet	12.0

Environmental

Operating Temperature	0 - 40 °C
Operating Relative Humidity	0 - 95 %
Operating Elevation	0-3000meters
Storage Temperature	-15 - 45 °C
Storage Relative Humidity	0 - 95 %
Storage Elevation	0-15000meters
Audible noise at 1 meter from surface of unit	41.0dBA
Online thermal dissipation	100.0BTU/hr

Conformance

Approvals	CE, CSA, EAC, EN/IEC 62040-1, EN/IEC 62040-2, ENERGY STAR V1.0 (EU), RCM, UL 1778, VDE
Standard warranty	3 years repair or replace (excluding battery) and 2 year for battery

Sustainable Offer Status

RoHS	Compliant
REACH	REACH: Contains No SVHCs
PEP	Available in Documentation tab



Life Is On | Schneider Electric

Sign up to stay up to date with best practices, new solutions and special offers.

Email

OK

WHO WE ARE

CONNECT WITH US

FIND A RESELLER

Zip/Postal Code

FIND

CATALOG KEYCODE

Enter Key Code

GO



[TERMS & CONDITIONS >](#)

[PRIVACY STATEMENT >](#)

© 2017, APC by Schneider Electric