




Share:



SRT10KXLI

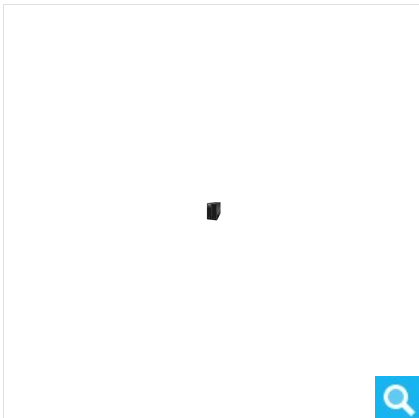

Description: High density, double-conversion on-line power protection with scalable runtime
 Includes : CD with software , Documentation CD , Installation guide , Temperature Probe , USB cable , Warranty card , Web/SNMP Management Card

APC Smart-UPS SRT 10000VA 230V

Call for More Information
66 2 617 5555

Includes: CD with software , Documentation CD , Installation guide , Temperature Probe , USB cable , Warranty card , Web/SNMP Management Card



Related Products, Accessories & Services

[View all accessories and replacement batteries for this product](#)



UPS Network Management Card 2

Call for More Information
66 2 617 5555



APC Dry Contact I/O Accessory

Call for More Information
66 2 617 5555



3 Year Renewal Extended Warranty For (1) Smart-UPS 8-10kVA

Call for More Information
66 2 617 5555

[Product Overview](#)

[Technical Specifications](#)

[Documentation](#)

[Drawings](#)

[Software & Firmware](#)

[Options](#)

Output

[Print Technical Specification](#)

Output power capacity	10.0 KWatts / 10.0 kVA
Max Configurable Power (Watts)	10.0 KWatts / 10.0 kVA
Nominal Output Voltage	230V
Output Voltage Distortion	Less than 2%
Output Frequency (sync to mains)	50/60Hz +/- 3 Hz
Other Output Voltages	220, 240
Load Crest Factor	3 : 1
Topology	Double Conversion Online
Waveform type	Sine wave

Output Connections

- (6) IEC 320 C13 (Battery Backup)
- (4) IEC 320 C19 (Battery Backup)
- (1) Hard Wire 3-wire (H N + G) (Battery Backup)
- (3) IEC Jumpers (Battery Backup)

Bypass Internal Bypass (Automatic and Manual)

Input

Nominal Input Voltage	230V , 400V 3PH
Input frequency	40 - 70 Hz (auto sensing)



Battery type	maintenance-free sealed lead-acid battery with suspended electrolyte, non-spill	
Input voltage adjustable range for mains operation	100 - 275 (half load), 173 - 476 (half load)V	
Typical recharge time	1.5hour(s)	
Replacement Battery	APCRBC140	
Other Input Voltages	220, 240, 380, 415	
Expected Battery Life (years)	3 - 5	
RBC Quantity	2	
Extendable Run Time	1	
Extended Run Options	APC-Smart-UPS-SRT-10000VA-230V	
Runtime	View Runtime Graph	View Runtime Chart
Efficiency	View Efficiency Graph	

Communications & Management

Interface Port(s)	RJ-45 10/100 Base-T , RJ-45 Serial , Smart-Slot , USB
Control panel	Multi-function LCD status and control console
Audible Alarm	Audible and visible alarms prioritized by severity
Emergency Power Off (EPO)	Yes
Available SmartSlot™ Interface Quantity	1

Surge Protection and Filtering

Surge energy rating	480Joules
---------------------	-----------

Physical

Maximum Height	432mm , 43.2CM
Maximum Width	263mm , 26.3CM
Maximum Depth	715mm , 71.5CM
Net Weight	111.82KG
Shipping weight	126.82KG
Shipping Height	461mm , 46.1CM
Shipping Width	600mm , 60.0CM
Shipping Depth	1000mm , 100.0CM
Color	Black

Environmental

Operating Temperature	0 - 40 °C
Operating Relative Humidity	0 - 95 %
Operating Elevation	0-3000meters
Storage Temperature	-15 - 45 °C
Storage Relative Humidity	0 - 95% non-condensing %
Storage Elevation	0-15000meters
Audible noise at 1 meter from surface of unit	55.0dBA
Online thermal dissipation	1947.0BTU/hr
Protection Class	IP 20

Conformance

Approvals	CE, CE Mark, EAC, EN/IEC 62040-1, EN/IEC 62040-2, ENERGY STAR V1.0 (EU), IRAM, RCM, VDE
Standard warranty	3 years repair or replace (excluding battery) and 2 years for battery

Sustainable Offer Status

RoHS	Compliant
REACH	REACH: Contains No SVHCs



Life Is On | Schneider Electric

Sign up to stay up to date with best practices, new solutions and special offers.

Email

OK

WHO WE ARE

CONNECT WITH US

FIND A RESELLER

Zip/Postal Code

FIND

CATALOG KEYCODE

Enter Key Code

GO



[TERMS & CONDITIONS >](#)

[PRIVACY STATEMENT >](#)

© 2017, APC by Schneider Electric