




Share:



SRT2200XLI

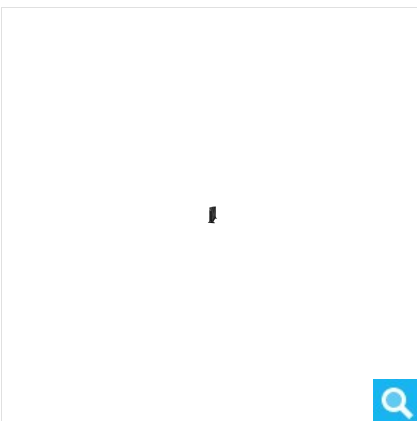

Description: High density, double-conversion on-line power protection with scalable runtime
 Includes : CD with software , Country-specific detachable power cord , Documentation CD , Installation guide , Removable support feet , USB cable , Warranty card

APC Smart-UPS SRT 2200VA 230V

Call for More Information
66 2 617 5555

Includes: CD with software , Country-specific detachable power cord , Documentation CD , Installation guide , Removable support feet , USB cable , Warranty card



Related Products, Accessories & Services

[View all accessories and replacement batteries for this product](#)



UPS Network Management Card 2 With Environmental Monitoring

Call for More Information
66 2 617 5555



APC Dry Contact I/O Accessory

Call for More Information
66 2 617 5555



3 Year Renewal Extended Warranty For (1) Smart-UPS 2.1-3kVA

Call for More Information
66 2 617 5555

[Product Overview](#)

[Technical Specifications](#)

[Documentation](#)

[Drawings](#)

[Software & Firmware](#)

[Options](#)

Output

[Print Technical Specification](#)

Output power capacity	1.98 KWatts / 2.2 kVA
Max Configurable Power (Watts)	1.98 KWatts / 2.2 kVA
Nominal Output Voltage	230V
Output Voltage Note	Configurable for 220 : 230 or 240 nominal output voltage
Output Voltage Distortion	Less than 2%
Output Frequency (sync to mains)	50/60Hz +/- 3 Hz
Other Output Voltages	220, 240
Load Crest Factor	3 : 1
Topology	Double Conversion Online
Waveform type	Sine wave
Output Connections	(8) IEC 320 C13 (Battery Backup) (2) IEC 320 C19 (Battery Backup) (2) IEC Jumpers (Battery Backup)
Bypass	Internal Bypass (Automatic and Manual)

Input

Nominal Input Voltage	230V
Input frequency	40 - 70 Hz (auto sensing)



Input Voltage range for main operations	750 - 275V
Included Battery Modules	1
Input voltage adjustable range for mains operation	100 - 275 (half load)V
Typical recharge time	3hour(s)
Replacement Battery	APCRBC141
Number of Power Cords	1
Expected Battery Life (years)	3 - 5
Other Input Voltages	220, 240
RBC Quantity	1

Extendable Run Time	1
Extended Run Options	APC-Smart-UPS-SRT-2200VA-230V

Runtime	View Runtime Graph	View Runtime Chart
---------	------------------------------------	------------------------------------

Efficiency	View Efficiency Graph
------------	---------------------------------------

Communications & Management

Interface Port(s)	RJ-45 Serial , Smart-Slot , USB
Control panel	Multi-function LCD status and control console
Audible Alarm	Audible and visible alarms prioritized by severity
Emergency Power Off (EPO)	Yes
Available SmartSlot™ Interface Quantity	1

Surge Protection and Filtering

Surge energy rating	340Joules
Filtering	--

Physical

Maximum Height	432mm , 43.2CM
Maximum Width	85mm , 8.5CM
Maximum Depth	584mm , 58.4CM
Net Weight	25.0KG
Shipping weight	30.84KG
Shipping Height	246mm , 24.6CM
Shipping Width	599mm , 59.9CM
Shipping Depth	810mm , 81.0CM
Color	Black
Units per Pallet	12.0

Environmental

Operating Temperature	0 - 40 °C
Operating Relative Humidity	0 - 95% non-condensing %
Operating Elevation	0-3000meters
Storage Temperature	-15 - 45 °C
Storage Relative Humidity	0 - 95% non-condensing %
Storage Elevation	0-15000meters
Audible noise at 1 meter from surface of unit	55.0dBA
Online thermal dissipation	703.0BTU/hr
Protection Class	IP 20

Conformance

Approvals	CE, CE Mark, EAC, EN/IEC 62040-1, EN/IEC 62040-2, ENERGY STAR V1.0 (EU), RCM, VDE
Standard warranty	3 years repair or replace (excluding battery) and 2 years for battery



REACH	REACH: Contains No SVHCs
Battery Directive	Compliant
Battery Notes	ts_Battery_Notes



Sign up to stay up to date with best practices, new solutions and special offers.

Email

WHO WE ARE

CONNECT WITH US

FIND A RESELLER

Zip/Postal Code

CATALOG KEYCODE

Enter Key Code



[TERMS & CONDITIONS >](#)

[PRIVACY STATEMENT >](#)

© 2017, APC by Schneider Electric