




Share:



SRT3000XLI

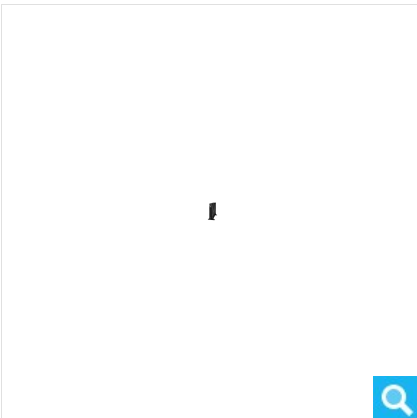

Description: High density, double-conversion on-line power protection with scalable runtime
Includes : CD with software , Country-specific detachable power cord , Documentation CD , Installation guide , Removable support feet , USB cable , Warranty card

APC Smart-UPS SRT 3000VA 230V

Call for More Information
66 2 617 5555

Includes: CD with software , Country-specific detachable power cord , Documentation CD , Installation guide , Removable support feet , USB cable , Warranty card

Related Products, Accessories & Services

[View all accessories and replacement batteries for this product](#)



UPS Network Management Card 2

Call for More Information
66 2 617 5555



APC Dry Contact I/O Accessory

Call for More Information
66 2 617 5555



1 Year Renewal Extended Warranty For (1) Smart-UPS 2.1-3kVA

Call for More Information
66 2 617 5555

[Product Overview](#)

[Technical Specifications](#)

[Documentation](#)

[Drawings](#)

[Software & Firmware](#)

[Options](#)

Output

[Print Technical Specification](#)

Output power capacity	2.7 KWatts / 3.0 kVA
Max Configurable Power (Watts)	2.7 KWatts / 3.0 kVA
Nominal Output Voltage	230V
Output Voltage Note	Configurable for 220 : 230 or 240 nominal output voltage
Output Voltage Distortion	Less than 2%
Output Frequency (sync to mains)	50/60Hz +/- 3 Hz
Other Output Voltages	220, 240
Load Crest Factor	3 : 1
Topology	Double Conversion Online
Waveform type	Sine wave
Output Connections	(8) IEC 320 C13 (Battery Backup) (2) IEC Jumpers (Battery Backup) (2) IEC 320 C19 (Battery Backup)
Bypass	Internal Bypass (Automatic and Manual)

Input

Nominal Input Voltage	230V
Input frequency	40 - 70 Hz (auto sensing)



Input Voltage range for main operations	760-275V
Typical recharge time	3hour(s)
Input voltage adjustable range for mains operation	100-275 (half load)V
Replacement Battery	APCRBC152
Expected Battery Life (years)	3 - 5
Number of Power Cords	3
RBC Quantity	1
Other Input Voltages	220, 240
Extendable Run Time	1

Extended Run Options APC-Smart-UPS-SRT-3000VA-230V

Runtime [View Runtime Graph](#) [View Runtime Chart](#)

Efficiency [View Efficiency Graph](#)

Communications & Management

Interface Port(s)	RJ-45 Serial , Smart-Slot , USB
Control panel	Multi-function LCD status and control console
Audible Alarm	Audible and visible alarms prioritized by severity
Emergency Power Off (EPO)	Yes
Available SmartSlot™ Interface Quantity	1

Surge Protection and Filtering

Surge energy rating	340Joules
Filtering	--

Physical

Maximum Height	432mm , 43.2CM
Maximum Width	85mm , 8.5CM
Maximum Depth	635mm , 63.5CM
Net Weight	31.3KG
Shipping weight	36.74KG
Shipping Height	246mm , 24.6CM
Shipping Width	599mm , 59.9CM
Shipping Depth	871mm , 87.1CM
Color	Black
Units per Pallet	6.0

Environmental

Operating Temperature	0 - 40 °C
Operating Relative Humidity	0 - 95% non-condensing %
Operating Elevation	0-3000meters
Storage Temperature	-15 - 45 °C
Storage Relative Humidity	0 - 95% non-condensing %
Storage Elevation	0-15000meters
Audible noise at 1 meter from surface of unit	55.0dBA
Online thermal dissipation	703.0BTU/hr
Protection Class	IP 20

Conformance

Approvals	CE, CE Mark, EAC, EN/IEC 62040-1, EN/IEC 62040-2, ENERGY STAR V1.0 (EU), RCM, VDE
Standard warranty	3 years repair or replace (excluding battery) and 2 years for battery

Sustainable Offer Status



Battery Directive	Compliant
Battery Notes	ts_Battery_Notes



Sign up to stay up to date with best practices, new solutions and special offers.

Email

OK

WHO WE ARE

CONNECT WITH US

FIND A RESELLER

Zip/Postal Code

FIND

CATALOG KEYCODE

Enter Key Code

GO



TERMS & CONDITIONS >

PRIVACY STATEMENT >

© 2017, APC by Schneider Electric