

Share:




### SUVTP30KH4B4S

Description: Effective 10-40kVA 3 phase UPS power protection against downtime and data loss for mission critical applications.  
Includes : Battery modules ship installed , Bolt Down Brackets , CD with software , Installation Guide , Network Management Card , Power modules ship installed , Start up included , User Manual

**APC Smart-UPS VT 30kVA 400V w/4 Batt. Mod., Start-Up 5X8, Internal Maint Bypass, Parallel Capability**

Call for More Information  
66 2 617 5555

Includes: Battery modules ship installed , Bolt Down Brackets , CD with software , Installation Guide , Network Management Card , Power modules ship installed , Start up included , User Manual

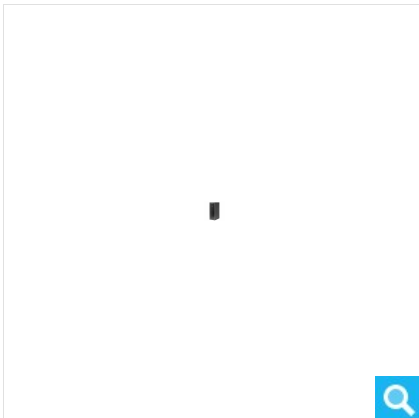

### Related Products, Accessories & Services

View all accessories and replacement batteries for this product



**Cisco Unity Express UPS Simple Signaling Cable**

Call for More Information  
66 2 617 5555



**Symmetra PX Battery Unit**

Call for More Information  
66 2 617 5555



**APC Parallel Maintenance Bypass Panel, Up To 3 Units 30-40kVA, 400V Wallmount**

Call for More Information  
66 2 617 5555

Product Overview

Technical Specifications

Documentation

Drawings

Software & Firmware

Options

Included components

#### Output

Print Technical Specification

Output power capacity	24.0 KWatts / 30.0 kVA
Max Configurable Power (Watts)	24.0 KWatts / 30.0 kVA
Nominal Output Voltage	400V 3PH
Output Voltage Note	Configurable for 380 : 400 or 415 V 3 Phase nominal output voltage
Efficiency at Full Load	96.4 %
Output Voltage Distortion	Less than 5% at full load
Output Frequency (sync to mains)	47 - 53 Hz for 50 Hz nominal
Output Frequency (not synced)	50Hz +/- 0.1% for 50Hz nominal
Other Output Voltages	380, 415
Load Crest Factor	3 : 1
Topology	Double Conversion Online
Waveform type	Sine wave



Normal Input Voltage	400V 3PH
Input frequency	40 - 70 Hz (auto sensing)
Input Connections	Hard Wire 5-wire (3PH + N + G)
Input voltage range for main operations	304 - 477V
Efficiency at Full Load	96.4 %
Other Input Voltages	380, 415
Maximum Input Current	41.0A
Input Power Factor at Full Load	0.98

### Batteries & Runtime

Battery type	VRLA
Included Battery Modules	4
Typical recharge time	5hour(s)
Nominal Battery Voltage	+/-192 V (split battery referenced to neutral)
Expected Battery Life (years)	3 - 5
RBC Quantity	4
Extendable Run Time	1
Extended Run Options	APC-Smart-UPS-VT-30kVA-400V-w-4-Batt-Mod-Start-Up-5X8-Internal-Maint-Bypass-Parallel-Capability
End of Discharge Battery Voltage	+/-154 V
Runtime	<a href="#">View Runtime Graph</a> <a href="#">View Runtime Chart</a>

### Communications & Management

Interface Port(s)	DB-9 RS-232 , Smart-Slot
Pre-Installed SmartSlot™ Cards	AP9631
Control panel	Multi-function LCD status and control console
Audible Alarm	Audible and visible alarms prioritized by severity
Emergency Power Off (EPO)	Yes

### Physical

Maximum Height	1490mm , 149.0CM
Maximum Width	523mm , 52.3CM
Maximum Depth	842mm , 84.2CM
Net Weight	629.09KG
Shipping weight	660.0KG
Shipping Height	1643mm , 164.3CM
Shipping Width	650mm , 65.0CM
Shipping Depth	1062mm , 106.2CM
Color	Black
Units per Pallet	1.0

### Environmental

Operating Temperature	0 - 40 °C
Operating Relative Humidity	0 - 95 %
Operating Elevation	0-999.9meters
Storage Temperature	-50 - 40 °C
Storage Relative Humidity	0 - 95 %
Storage Elevation	0-15000meters
Audible noise at 1 meter from surface of unit	55.0dBA



Standard warranty	1 year repair or replace, Start-Up Service
-------------------	--



Sign up to stay up to date with best practices, new solutions and special offers.

Email

OK

WHO WE ARE

CONNECT WITH US

FIND A RESELLER

Zip/Postal Code

FIND

CATALOG KEYCODE

Enter Key Code

GO



TERMS & CONDITIONS >

PRIVACY STATEMENT >

© 2017, APC by Schneider Electric